




TOP HANDLING ENGINEERING

GOODS HOIST



ADVANTAGES BY HAVING A GOODS HOIST

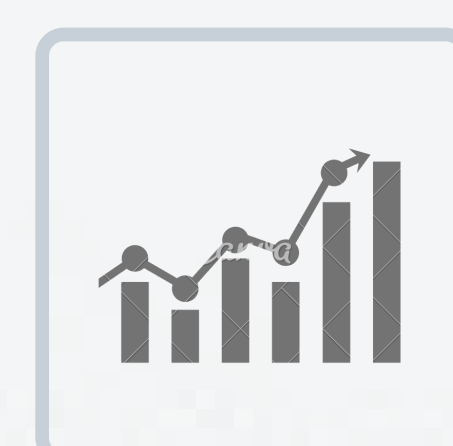

IMAGE

Increasing of company image



TIME

Increasing business efficiency with high saving in goods transferring time




LABOUR

Reducing of manpower dependency



COST

Saving on company operating cost

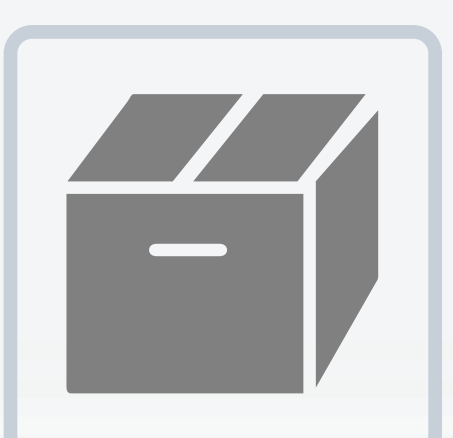

SPACE

Fully utilised on limited space



RELIABILITY

A reliable investments which could last for decades

HIGH DURABLE HOIST



VOHOBOO | HOIST BRAND
WUHAN,CHINA | HOIST ORIGIN
TYPE CD | HOIST MODEL
HOOK TYPE | HOIST TYPE
3200 KG | HOIST CAPACITY
8M / MIN | HOIST SPEED
4.5 KW | HOIST MOTOR
3PH / 415 V / 50Hz | POWER SOURCE

SPECIFICATION OF GOODS HOIST

SAFE WORKING LOAD : 500KG - 2000KG

MAX CAR CAGE SIZE : 3 m2

LANDING FLOOR : 2 - 5


TRAVELLING HEIGHT : 12 METER

CAR WALL MATERIAL : MILD STEEL PLATE

CAR PLATFORM : MILD STEEL CHECKED PLATE

GUIDE RAIL : MILD STEEL I BEAM

MOTOR ROOM : I BEAM WITH PLATFORM

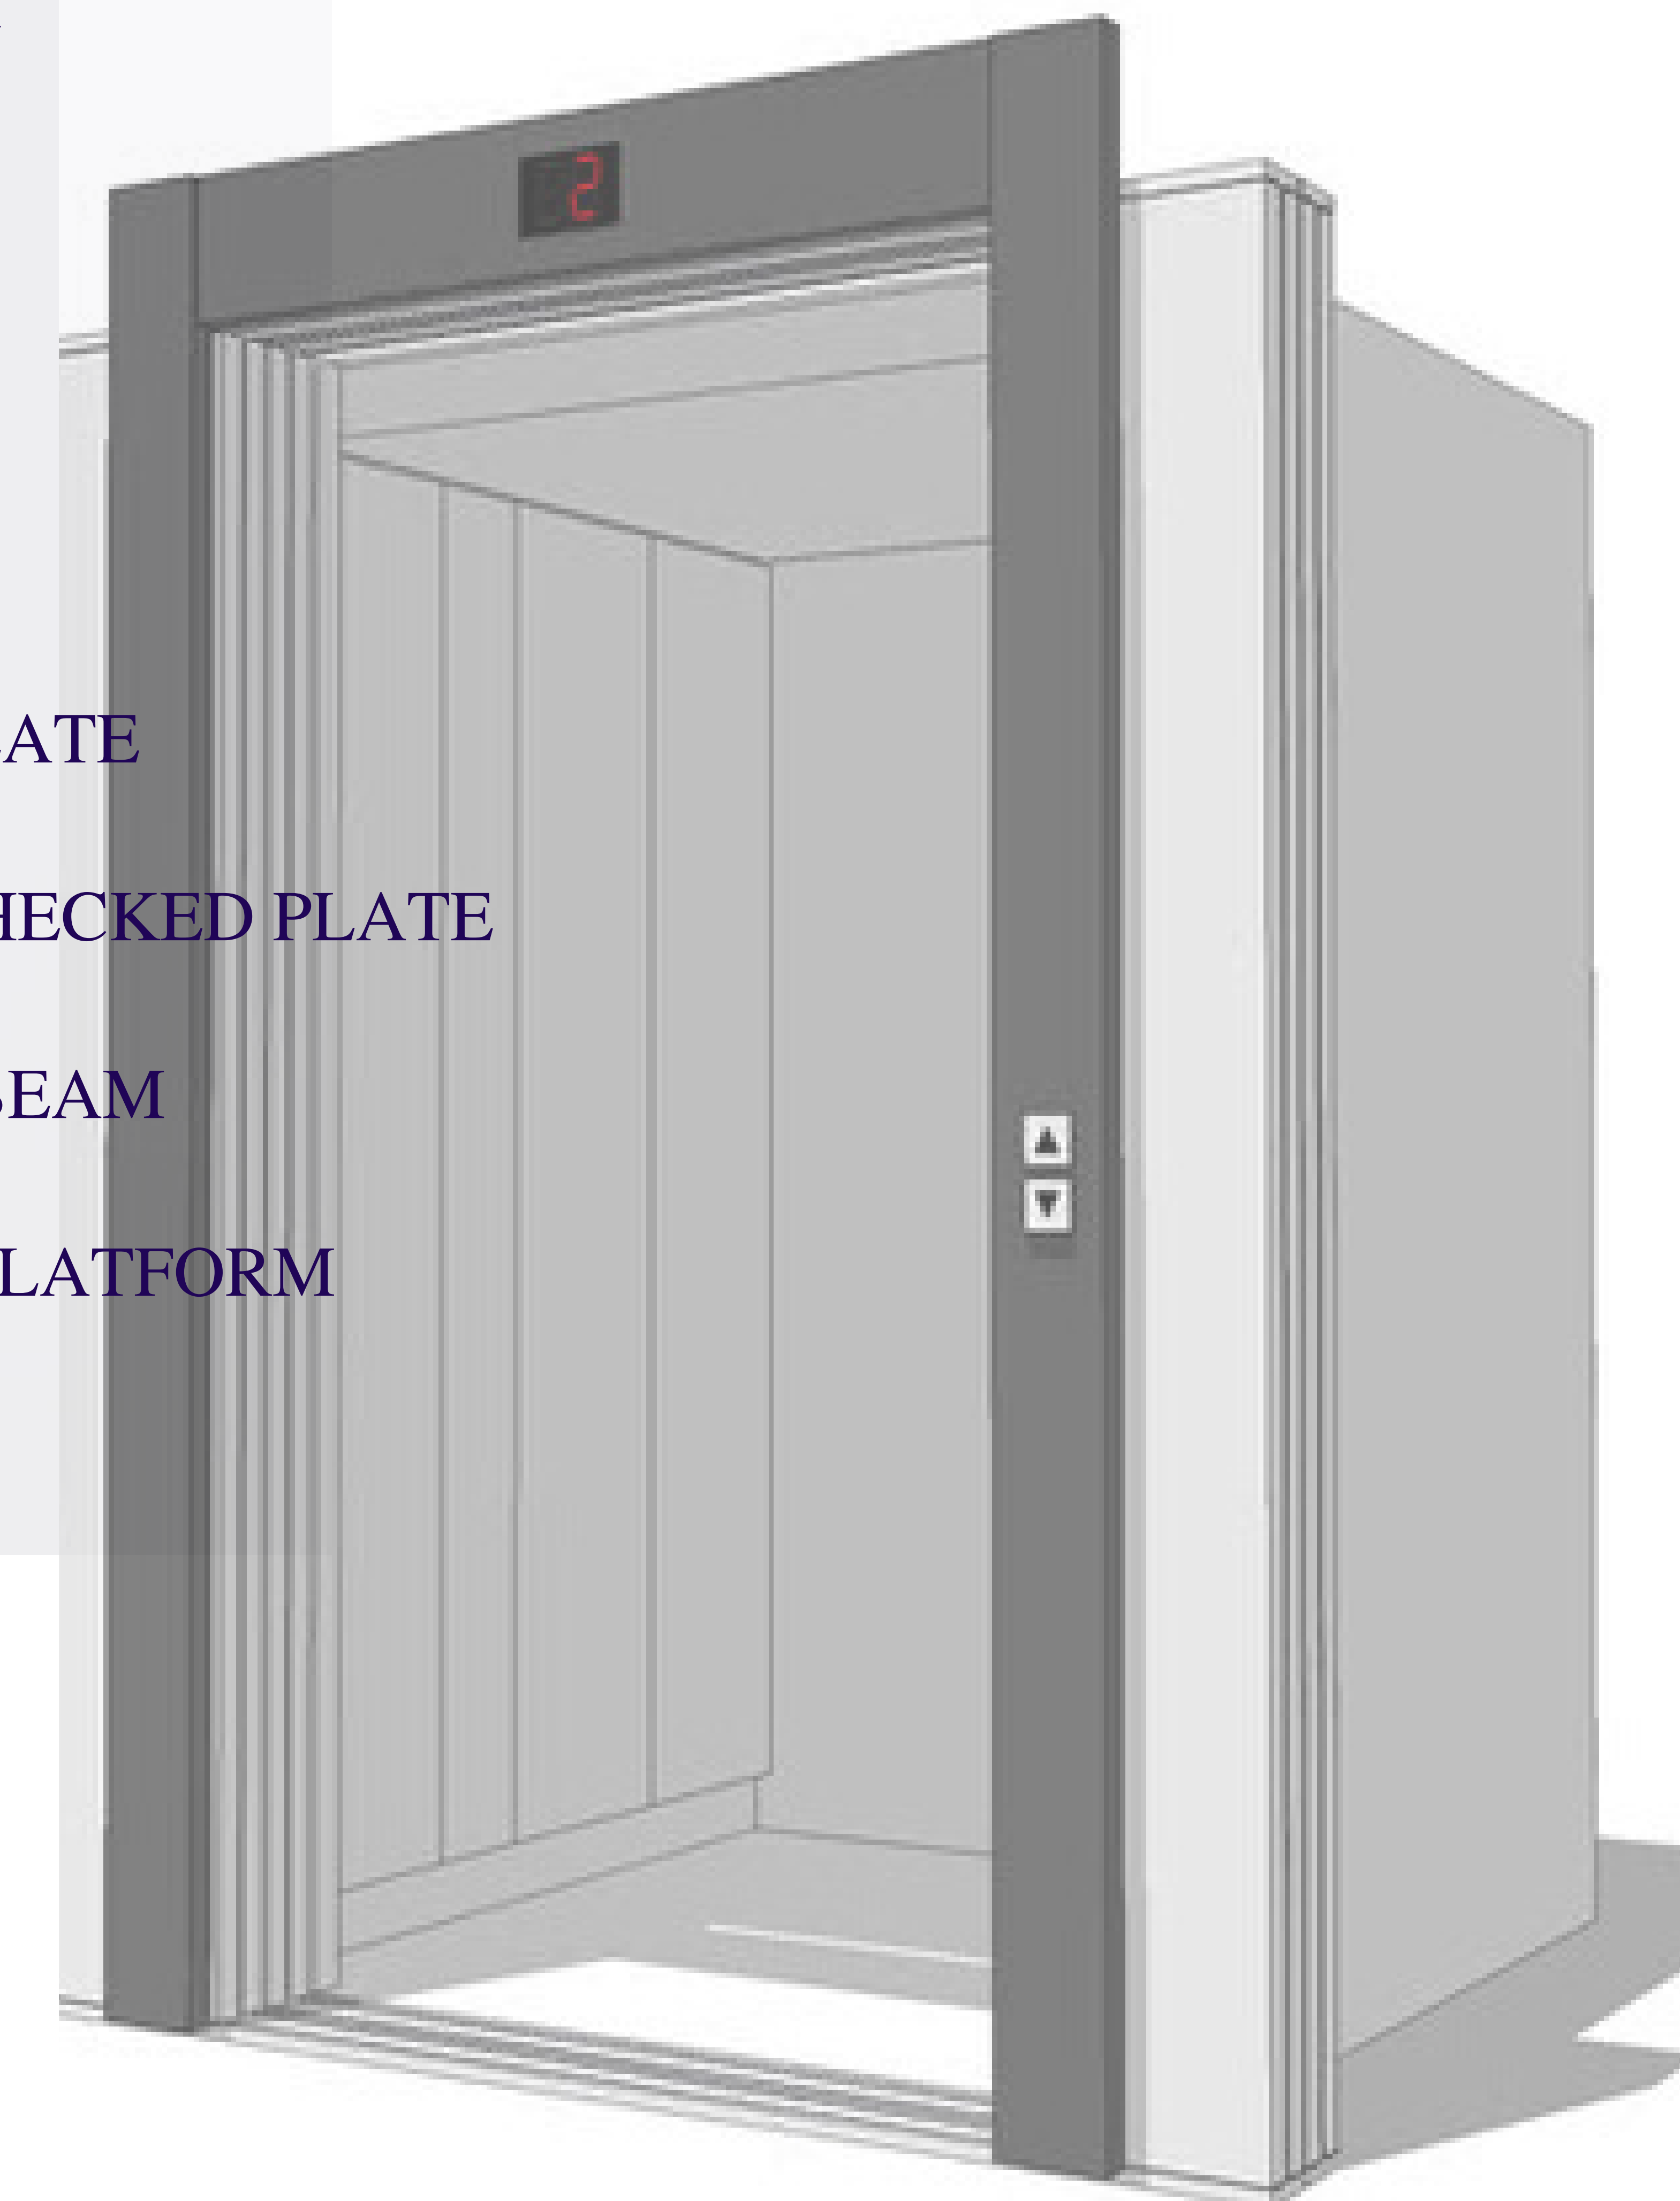

SAFETY FUTURES

SAFETY CATCH

Imported safety catch system prevents free fall of cage in event of wire rope failure.

MACHANICAL INTERLOCK

Prevent opening of gate when lift in operation or is not at the respective floor

ELECTRICAL INTERLOCK

Stop operation when door are not fully closed, to prevent occurrence of accidents.

SAFETY LIMIT SWITCH

Prevent the cage from over lowering and over hoisting at the upper and lower limit switch.

LIGHT

Provide led light inside carcage.

IMPORTED GUIDE SHOES

Movement of cage is properly guided, stable, quite and smooth preventing metal to metal friction.

EMERGENCY BUTTON C/W LOCK

Stop the operation of goodshoist in the event of emergency and prevent unauthorized usage.

CONTROL PANEL WITH DIGITAL INDICATOR

Each landing floor will have digital indicator showing the position of the carcage. All controls will be automatic and of single push button type base on first class basis.

GOODSHOIST

STRUCTURE

